


JASA Packaging Solutions stands for innovation, quality and flexibility in packaging technology. We specialize in developing and manufacturing vertical packaging machines, sleeves and complete weighing and packaging lines. Producers and packers of all kinds of food products around the globe trust our expertise, for more than thirty years, 24/7.

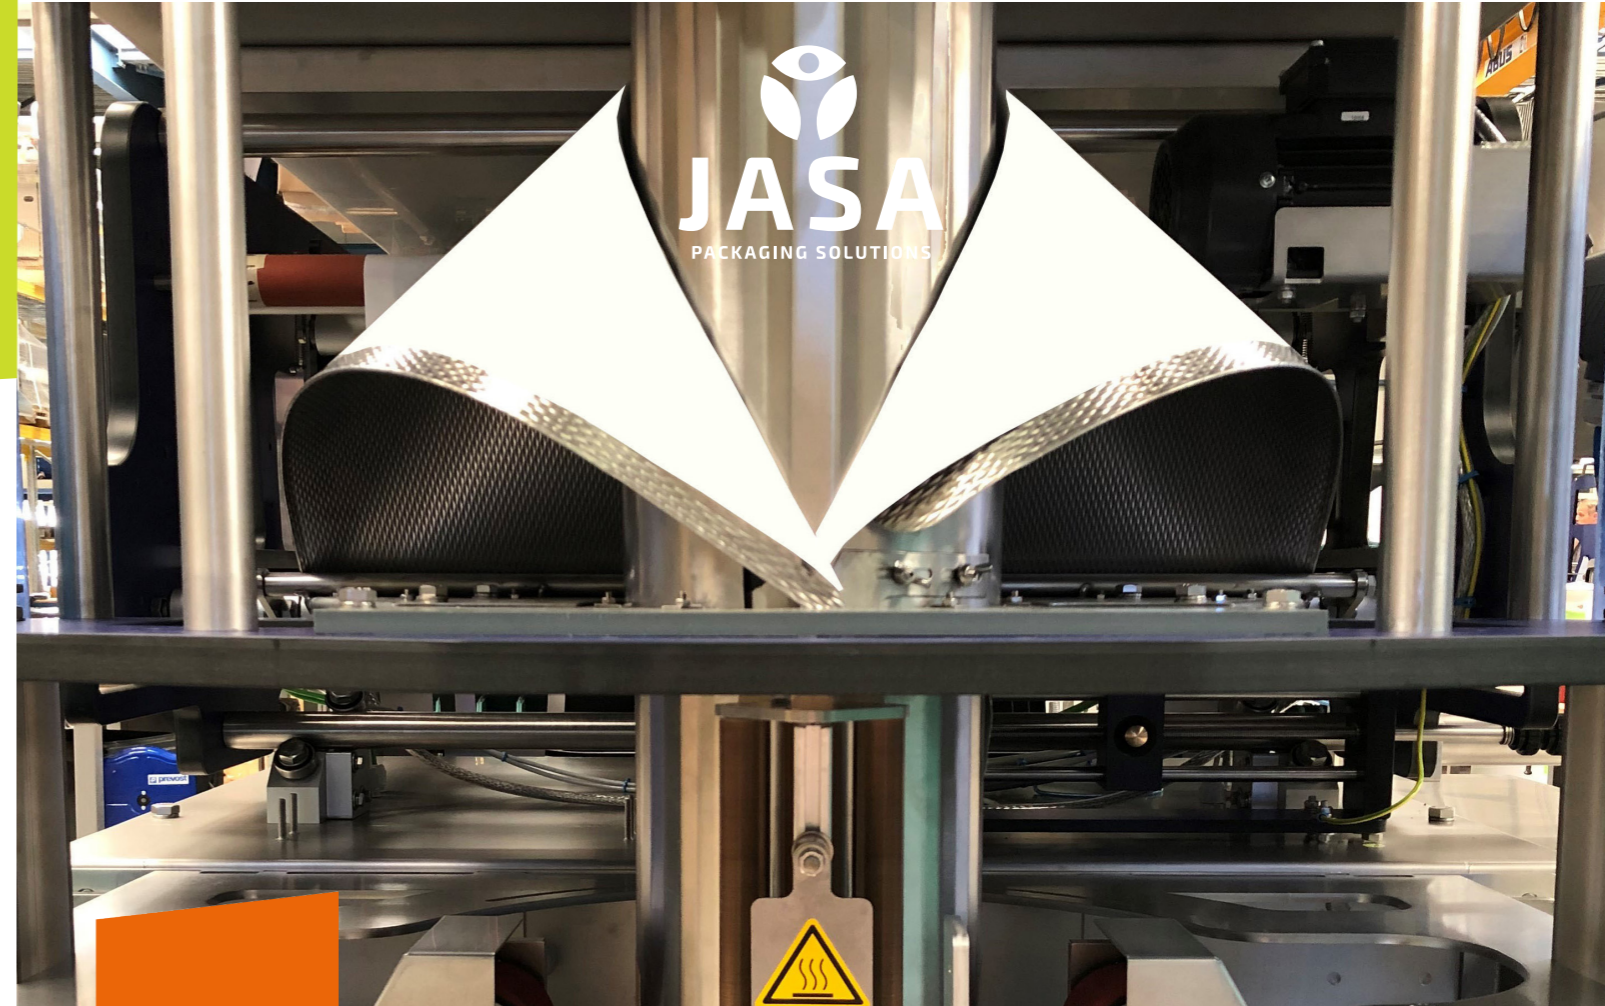

A DUTCH
COMPANY

PRODUCT DATA SHEET JASA QUICKPACK

MODEL JASA QUICKPACK

MACHINE SPECIFICATIONS

Mechanical capacity** (pack./min.)	40
Changeover time (min.)	10
Electrical capacity (kW)	3
Electrical requirements***	3x400VAC+N+PE, 16A, 50HZ / 3x240 VAC+PE, 16A, 60HZ(additionl options required)
Necessary air pressure (bar)	6
Pneumatic capacity* (L/min.)	520
Compressed air specifications	8573-1:2010{7:4:4}

MACHINE RATING

IP rating machine	55
IP rating display and electrical cabinet	65
Sound Pressure (dB(A))	72
EC declaration	yes

ENVIRONMENT FOR PACKAGING MACHINES

Ambient temperature	between +5 and +40°C
Relative humidity	between 10% - 90% at 20°C, without condensation

TRANSPORT

Packaging dimensions (L*W*H)*(mm)	2.900 x 1.600 x 2.300
Nett weight* (kg)	925
Packaging weight* (kg)	975
Country of origin	the Netherlands
Customs Tariff Code	84223000

* Exact capacity and weight depend on the implementation of the machine.

** The achieved capacity in the field depends on the actual product & film properties, bag length, portion size, infeed method and environmental conditions.

***It is advisable to connect the machine directly to the mains supply without the use of a power plug. If local legislation requires the use of an residual current circuit-breaker it is advised to choose a model witch is suitable to be used with frequency controllers and servo drives (G/F type (ÖVE E 8601))

The **JASA QUICKPACK** is a multifunctional packaging machine designed for the packaging of non-processed fruits and vegetables. This versatile machine can produce the most common packagings of a lot of packaging materials. The Carry Fresh packaging is made on this machine. The unique lable synchronisation system makes sure that the front- and backside of the packaging always run synchronously.



A machine especially designed for the packaging of non-processed vegetables and fruit

JASA QUICKPACK



Headoffice: Hazenkoog 14, 1822 BS Alkmaar (NL) T +31 72 561 27 00 E sales@jasa.nl W www.jasa.nl
 US Office: 7429 Whitepine Rd, 23237, Richmond VA (USA) T +1 804 290 3683 E sales@jasapackaging.com
 W www.jasapackaging.com
 Canada: 1585 Pine Springs Ln Delta BC, V4M 0A7 (CA) T +1 804 290 3683 E sales@jasapackaging.com
 W www.jasapackaging.com

All data, products and productspecifications are intended for general information only and subject to change without notice.

PDS-JASAQP-EN-2022-08-25



JASA SmartDisplay



Stainless steel constructions and hygienic design

Conform CE safety standards

Short changeover times

PLC controls, Siemens



AVAILABLE OPTIONS

JASA QUICKPACK

Label synchronisation unit	V
Airpress unit	V
Product protection cushions	V
Heating electrical cabinet	V
MAP connection	V
Film splice unit tape or seal	V
Luminescence sensor film mark detection	V
Additional unwinding unit for separate film roll	V
Film steering	V
Thermo transfer printer	V
Label applicator	V
Perforating system	V

BAGS

The JASA QUICKPACK is a multifunctional machine which can produce different bag styles with several options.

BAG STYLES





Pillowbag Gusseted bag Doy Style Vertisac Carry Fresh® Carry -Charta®

BAG SIZES

Bag width, closed centric (mm)	150 - 350
Bag width, closed excentric (mm)	170 - 350
Bag length, in one sealstep (mm)	420

PACKAGING MATERIALS	JASA QUICKPACK
Polyethylene	V
Polypropylene	V
Laminated film	V
Laminated net (Claf, Ortex, Xmesh, Juta etc)	V
Extruded net	V
*Coated paper	V

Operating temperature: between +15 and +23°C
 Relative humidity: between 30% - 50% at 20°, without condensation

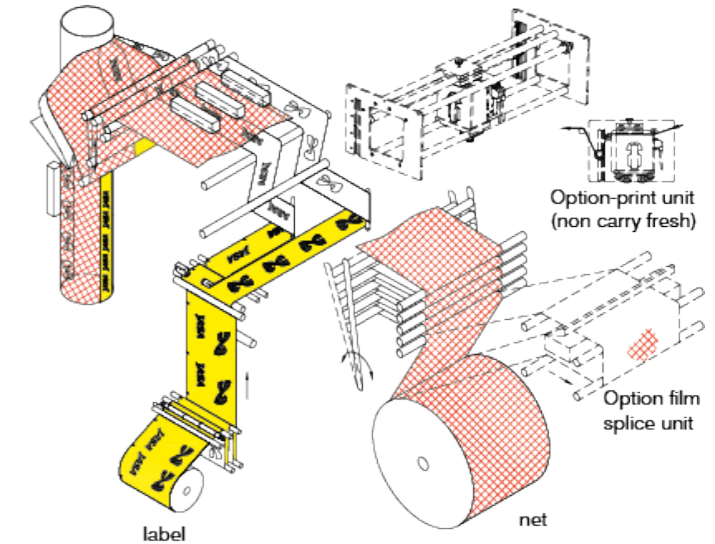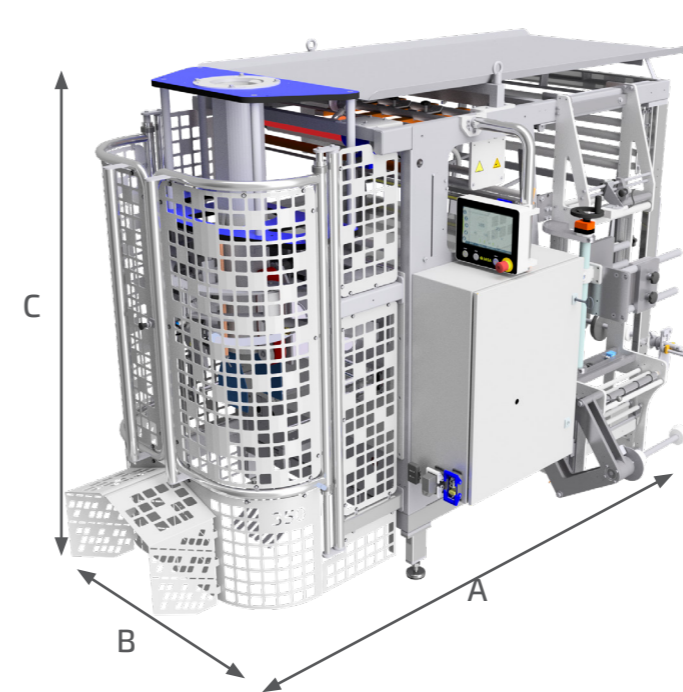

DIMENSIONS*	JASA QUICKPACK
Max. length (A) (mm)	2.884
Max. width (B) (mm)	1.419
Max. height (C) (mm)	1.887
Outside diameter net reel (mm)	800
Outside diameter film reel (mm)	400
Max. weight net reel (kg)	60
Max. weight film reel (kg)	40

*Exact dimensions depend on the final configuration of the machine.